

KENWOOD

Listen to the Future

MOBILE ENTERTAINMENT SYSTEMS 2006

Mobile Video



DC DOLBY DIGITAL	5.1	DVD VIDEO	WMA MP3
RDS	50W X4 MOSFET	3 RCA PREOUTS 2V	1AV-IN 1AV-OUT
Rear View Camera Input	DUAL ZONE	External Media Control	Bluetooth H/F Ready

SIRIUS READY HD Radio

DDX6019

6.95" Wide Double-DIN Indash Monitor DVD/WMA/MP3 Receiver

- 6.95 inch Wide Color TFT Active Matrix Display
- Motorized Slide-down & Reverse Front Panel
- Interactive Touchscreen Control with OSD
- Audio Easy Control Mode while Playing Visual Source
- Selectable Wall Paper (6 Patterns)
- Installer/Backup Memory of Audio/Video Setup
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- 3 Preouts with 2V Pre-out Level
- 1 RCA AV Input/1 RCA AV Output
- Video Input for Rear View Camera

- RGB Input for Navigation System
- System Q/System E's+
- DVD Menu Direct Touchscreen Control
- MPEG 1/2 Video file (.mpg) and JPEG file (.jpg) Playback
- Dual Zone Source & Volume Control
- DVD±R/RW Compatible
- External Media Control — iPod Ready
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- Optional TV Tuner (KTC-V300N)



DC DOLBY DIGITAL	5.1	DVD VIDEO	WMA MP3
RDS	50W X4 MOSFET	3 RCA 5V	2AV-IN 1AV-OUT
Rear View Camera Input	DUAL ZONE	External Media Control	

SIRIUS READY HD Radio

KVT-717DVD

7.0" Wide Fully Motorized Indash Monitor DVD/WMA/MP3 Receiver

- 7.0 inch Wide Color TFT Active Matrix Display
- Fully-automatic Open/Close with slide and angle adjustments
- Interactive Touchscreen Control with OSD
- Audio Easy Control Mode while Playing Visual Source
- Selectable Wall Paper (6 Patterns)
- Installer/Backup Memory of Audio/Video Setup
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- 3 Preouts with 5V Pre-out Level
- 2 RCA AV Inputs/1 RCA AV Output

- Video Input for Rear View Camera
- RGB Input for Navigation System
- System Q/System E's+
- DVD Menu Direct Touchscreen Control
- MPEG 1/2 Video file (.mpg) and JPEG file (.jpg) Playback
- Dual Zone Source & Volume Control
- DVD±R/RW Compatible
- External Media Control — iPod Ready
- Optional TV Tuner (KTC-V500N)



2AV-IN 1AV-OUT

LZ-702W

6.95" Wide TFT Display

- 6.95 inch Wide TFT Display
- Interactive Touchscreen Control with OSD
- Number of Pixels: 336,960
- Display Mode Selector (Normal/Full/Zoom/Cinema/Just)
- Auto Dimmer Control
- 2 AV Inputs (RCA, PAL/NTSC Automatic Selection)

- 1 AV Output (RCA)
- RGB Input for Navigation System
- Built-in Speaker
- Remote Sensor
- Supplied with Headrest Mounting Bracket
- Supplied with On-dash Mounting Bracket



RDS	50W X4 MOSFET	3 RCA 5V	2AV-IN 1AV-OUT
Rear View Camera Input	DUAL ZONE	External Media Control	

SIRIUS READY HD Radio

KVT-M707

7.0" Wide Fully Motorized Indash Monitor Receiver

- 7.0 inch Wide Color TFT Active Matrix Display
- Fully-automatic Open/Close with slide and angle adjustments
- Interactive Touchscreen Control with OSD
- Audio Easy Control Mode while Playing Visual Source
- Selectable Wall Paper (6 Patterns)
- Installer/Backup Memory of Audio/Video Setup
- Maximum Output Power: 50W x 4 (MOSFET Power IC)

- 3 Preouts with 5V Pre-out Level
- 2 RCA AV Inputs/1 RCA AV Output
- Video Input for Rear View Camera
- RGB Input for Navigation System
- System Q/System E's+
- Dual Zone Source & Volume Control
- External Media Control — iPod Ready
- Optional TV Tuner (KTC-V500N)



KNA-G510

Hideaway Navigation System

- Touchscreen Control with Kenwood Compatible Monitors
- Built-in Map Data; USA (Alaska, Hawaii)/CND
- Over 5 million POI
- SD card slot for map upgrade
- Compact Body (4.5" x 4" x 1.5")
- 2D/3D View
- TTS Voice Guidance; English (US), French (Canadian), Spanish (US)
- Track Log Display
- Trip Computer

- WAAS enabled, 12 parallel channel GPS receiver
- TMC Traffic info Ready (Clear Channel)*
- XM Traffic & Weather Ready*
- XM Audio Ready*
- Multi destination search mode (Address, P.O.I., Streets & Cities, Map, Memory Points, Recent finds, Previous destination)
- Route calculation (Faster time, Shorter distance, Off road)
- Auto re-route/Auto zoom/Detour/GPS information

*Subscription required.

GXM-30

XM Receiver

GTM-10

RDS-TMC Receiver



CCD-900

Rear View Camera

- 1/4 inch Color CCD
- Number of Pixels: Approx. 270,000
- Wide View Angle: horizontal 120 degrees, vertical 84 degrees
- Video Output (RCA)



KTC-V300N

Hide-away TV Tuner Unit

- NTSC TV Tuner
- 16 Preset Stations (TV1/TV2)
- Auto Memory
- Auto Seek
- Film Type Diversity TV Antenna

CD Receivers

USB

Playing music from a USB thumb drive or a portable player USB mass storage device has never been more convenient. Select Kenwood models offer USB connections so your music can easily be updated for playback in the vehicle and beyond.

ACDrive

ACDrive allows audible voice index browsing to find and play back any compressed audio file that is burned on a disc or USB device (select models). Search functions like Playlist, Artist, Album, Genre, Folder and even Letter Seek make finding what you want to listen to fast and simple. All ACDrive models are packaged with Media Manager desktop software to help organize, edit and rip music for an enhanced and safe music experience in the car.



PMM

Supreme

Supreme restores the high frequency elements that are often lost in a typical compressed audio file, making playback of nearly any MP3, WMA or AAC file a better sounding experience.



Graphic Motion Analyzer

Into performance? G-Analyzer offers you five different types of displays: G-Graphic, G-Meter, G-Counter, Stop Watch, and our latest Horse Power function which measures and records the maximum horse power of your car. All the GMA Information can be viewed as numerical data or enhanced graphics on the 64-color or full-color OEL display.



G-Graphic Display



G-Meter Display



Horse Power Display

Double-DIN

With an increasing amount of Double-DIN applications in the new car market, Kenwood offers a wider selection of brand new Double-DIN receivers. A large rotary volume control and larger preset buttons set the bar for in-dash ergonomics. Supplied with both front load and a GM/Toyota kit, installation will be a snap.

Bluetooth Hands-Free

Connect the KCA-BT100 to your compatible receiver and talk hands free in your car! With Bluetooth wireless communication technology, you can make and end phone calls from the receiver and download the phonebook into your Bluetooth compatible in-dash unit. This system allows you to register up to five cell phones.

CD Receivers/1DIN



64Color FL	G-Analyzer	USB	ACDrive	AAC WMA MP3
RDS	External Media Control	Bluetooth H/F Ready	50W X 4 MOSFET	3 R.C.A. 4V
AUX RCA Input	DUAL ZONE	SIRIUS HD Radio		

KDC-MP832U

USB/AAC/WMA/MP3/CD Receiver with External Media Control

- Auto-Slide Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 64 Color Fine Dot FL Display
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- USB Interface (Type A, 1.0m Pigtail)
- ACDrive (Advanced Codec Drive)
- AAC/WMA/MP3 Playback
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- G-Analyzer (Graphic Motion Analyzer)
- System Q/System E's+
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input
- 3 Preouts with 4V Pre-output Level



64Color FL	G-Analyzer	AAC WMA MP3	Supreme	External Media Control
50W X 4 MOSFET	3 R.C.A. 4V	AUX RCA Input	DUAL ZONE	

SIRIUS HD Radio

KDC-MP732

AAC/WMA/MP3/CD Receiver with External Media Control

- Auto-Slide Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 64 Color Fine Dot FL Display
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- AAC/WMA/MP3 Playback
- G-Analyzer (Graphic Motion Analyzer)
- System Q/System E's+
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input
- 3 Preouts with 4V Pre-output Level



14-Seg FL	USB	ACDrive	AAC WMA MP3	External Media Control
Bluetooth H/F Ready	50W X 4 MOSFET	2 R.C.A. 2.5V	AUX RCA Input	DUAL ZONE

SIRIUS HD Radio

KDC-MP632U

USB/AAC/WMA/MP3/CD Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- USB Interface (Type A, 1.0m Pigtail)
- ACDrive (Advanced Codec Drive)
- AAC/WMA/MP3 Playback
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- System Q/System E's
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input
- 2 Preouts (Rear/Subwoofer Out Switchable) with 2.5V Pre-output Level



14-Seg FL	AAC WMA MP3	Supreme	External Media Control	50W X 4 MOSFET
2 R.C.A. 2V	SIRIUS HD Radio			

KDC-MP332

AAC/WMA/MP3/CD Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- AAC/WMA/MP3 Playback
- Supreme
- System Q
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 2 Preouts



14-Seg FL	WMA MP3	Supreme	External Media Control	50W X 4 MOSFET
2 R.C.A. 2V	SIRIUS HD Radio			

KDC-MP2032

WMA/MP3/CD Receiver with External Media Control

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- WMA/MP3 Playback
- Supreme
- System Q
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 2 Preouts



14-Seg FL	WMA MP3	Supreme	External Media Control	45W X 4 MOSFET
1 R.C.A. 2V	SIRIUS HD Radio			

KDC-MP232

WMA/MP3/CD Receiver with External Media Control

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Maximum Output Power: 45W x 4 (MOSFET Power IC)
- WMA/MP3 Playback
- Supreme
- System Q
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 1 Preout

CD Receivers/Double-DIN



14-Seg FL	USB	ACDrive	AAC WMA MP3	RDS
External Media Control	Bluetooth H/F Ready	50W X4 MOSFET	2 RCA 2.5V	AUX RCA Input
DUAL ZONE SIRIUS HD Radio				

DPX501

USB/AAC/WMA/MP3/CD Receiver with External Media Control

- Double-Din Size Faceplate (Supplied with Universal Frame)
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- USB Interface (Type A, 1.5m Cable Included)
- ACDrive (Advanced Codec Drive)
- AAC/WMA/MP3 Playback
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- System Q/System E's+
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input
- 2 Preouts with 2.5V Pre-output Level



14-Seg FL	AAC WMA MP3	Supreme	External Media Control	50W X4 MOSFET
2 RCA 2.5V	AUX RCA Input	SIRIUS HD Radio	External Media Control	

DPX301

AAC/WMA/MP3/CD Receiver with External Media Control

- Double-Din Size Faceplate (Supplied with Universal Frame)
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- AAC/WMA/MP3 Playback
- System Q/System E's+
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input
- 2 Preouts with 2.5V Pre-output Level

DVD Receiver



DCI DIGITAL	1080P	DVD VIDEO	WMA MP3	RDS
50W X4 MOSFET	3 RCA 4V	1AV-OUT	DUAL ZONE	External Media Control

SIRIUS HD Radio

KDV-412

DVD/WMA/MP3 Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- DVD Video/VCD Playback
- WMA/MP3 Playback
- DVD±R/RW, CD-R/RW Compatible
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- System Q/System E's+
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- Video Output
- 3 Preouts with 4V Pre-output Level
- Subwoofer Out/Fixed Audio Out (1.2V) Switchable

CD Receivers/1DIN



14-Seg FL	AAC WMA MP3	Supreme	External Media Control	50W X4 MOSFET
3 RCA 4V	DUAL ZONE	SIRIUS HD Radio	External Media Control	

KDC-MP5032

AAC/WMA/MP3/CD Receiver with External Media Control

- Auto-Slide Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- AAC/WMA/MP3 Playback
- Supreme
- System Q/System E's+
- Installer/Backup Memory of Audio Setup
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- Dual Zone Source & Volume Control
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 3 Preouts with 4V Pre-output Level



14-Seg FL	USB	AAC WMA MP3	External Media Control	Bluetooth H/F Ready
50W X4 MOSFET	2 RCA 2V	SIRIUS HD Radio	External Media Control	

KDC-MP532U

USB/AAC/WMA/MP3/CD Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- USB Interface (Type A, 1.0m Pigtail)
- AAC/WMA/MP3 Playback
- System Q
- Optional Bluetooth Hands-Free Unit Ready (KCA-BT100)
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 2 Preouts



14-Seg FL	AAC WMA MP3	Supreme	External Media Control	50W X4 MOSFET
3 RCA 4V	SIRIUS HD Radio	External Media Control		

KDC-MP4032

AAC/WMA/MP3/CD Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Display Off Mode
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- AAC/WMA/MP3 Playback
- Supreme
- System Q/System E's
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 3 Preouts with 4V Pre-output Level



14-Seg FL	WMA MP3	Supreme	45W X4	1 RCA 2V
-----------	---------	---------	--------	----------

KDC-MP202

WMA/MP3/CD Receiver

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Maximum Output Power: 45W x 4
- WMA/MP3 Playback
- Supreme
- System Q
- TEL Mute
- 1 Preout



7-Seg LCD	50W X4	2 RCA 2V
-----------	--------	----------

KDC-1032

CD Receiver

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 7-Segment LCD Display (White LED Backlight)
- Maximum Output Power: 50W x 4
- System Q
- 2 Preouts



5x7 Dot LCD	WMA MP3	External Media Control	50W X4 MOSFET	2 RCA 2V
AUX RCA Input	DUAL ZONE	SIRIUS HD Radio		

EZ500

WMA/MP3/CD Receiver with External Media Control

- Flip-Down Detachable Faceplate
- Rotary Encoder for Easy Operation
- 5 x 7 Dot Matrix LCD Display with White LED Backlight
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- WMA/MP3 Playback
- System Q-Ex/System E's
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- AUX Input
- 2 Preouts (Rear/Subwoofer Out Switchable)



7-Seg LCD	45W X4	1 RCA 2V
-----------	--------	----------

KDC-132

CD Receiver

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 7-Segment LCD Display (White LED Backlight)
- Maximum Output Power: 45W x 4
- System Q
- 1 Preout

Cassette Receivers



KRC-535 50W X4 2RCA PREOUTS External Media Control SIRIUS READY

Cassette Receiver with External Media Control

- D-Mask+
- Dot Matrix Multicolor Wide LCD with White LED Backlight
- SIRIUS Satellite Radio Ready
- Music Keg Ready
- Maximum Output Power: 50W x 4
- 2 Preouts
- System Q-Ex
- External Media Control

40W X4

1RCA PREOUTS

External Media Control



KRC-235

Cassette Receiver with External Media Control

- Multicolor LCD (Negative Type)
- Maximum Output Power: 40W x 4
- 1 Preout
- ec4
- AUX Input with Optional Unit
- External Media Control

HD Radio



KTC-HR100TR

HD Radio® Tuner

- Compatible with Tomorrow Radio, Analog and Digital FM/AM Radio with supplemental channel
- Provides Song Title, Artist and Other Content Information via Kenwood In-Dash Receivers
- Direct Connect to Many Kenwood In-dash Receivers via 5-Line Changer Terminal
- 5-Line Pass-Thru
- 1 RCA Preout

Equalizers



KGC-9044

11-Band Equalizer

- 4-Color LCD Display and 11-Band Spectrum Analyzer
- High Voltage (4V) Pre-amplification
- Three Preset Curves + Three Programmable Memories
- "FLIP DOWN" TDF
- Subwoofer Output

Marine



KDC-232MR

Marine CD Receiver

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- System Q
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 1 Preout
- Marine Wired Remote Ready (KCA-RC50MR)
- Conformal Coated Main PCB



KCA-RC50MR/RC50MRB

Wired Marine Remote Control

- Finish: White (KCA-RC50MR); Black (KCA-RC50MRB)
- Works with KDC-225MR and
- Other Marine In-Dash Receivers
- Wired Remote Control
- SIRIUS Satellite Radio Ready



KRC-435 47W X4 2RCA PREOUTS External Media Control SIRIUS READY

Cassette Receiver with External Media Control

- Multicolor Wide LCD with White LED Backlight
- SIRIUS Satellite Radio Ready
- Maximum Output Power: 47W x 4
- 2 Preouts
- System Q
- External Media Control

40W X4

KRC-108S

Cassette Receiver

- Fixed Faceplate
- Green Backlight LCD (Positive Type)
- Maximum Output Power: 40W x 4
- ec4

CD Changers



10 DISC

KDC-C521FM

10 Disc CD Changer with FM Modulator and Remote Controller

- 10 Disc Capacity
- CD-R/CD-RW Compatible
- Kenwood-Designed Anti-Vibration Mechanism
- 3 Angle Mounting
- LCD Display for Disc & Track Number (5 x 7 DOT, 12 character)
- Supplied with Remote Control Unit (Grip Type)

KDC-C471FM

6 DISC

6 Disc CD Changer with FM Modulator



KRC-335 45W X4 2RCA PREOUTS External Media Control

Cassette Receiver with External Media Control

- Multicolor LCD with White LED Backlight
- Maximum Output Power: 45W x 4
- 2 Preouts
- System Q
- AUX Input with Optional Unit
- Full Logic Mechanism
- External Media Control

CD Player



KDC-D301

1-DIN CD Player

- Spectrum Analyzer
- CD-R/CD-RW Compatible



10 DISC

KDC-C719

10 Disc CD Changer

- 10 Disc Capacity
- CD-R/CD-RW Compatible
- CD Text Ready
- DNPS (Disc Name Presets: 100 Discs)

KDC-C669

6 DISC

6 Disc CD Changer



10 DISC

KDC-C719

10 Disc CD Changer

- 10 Disc Capacity
- CD-R/CD-RW Compatible
- CD Text Ready
- DNPS (Disc Name Presets: 100 Discs)

KDC-C669

6 DISC

6 Disc CD Changer

KGC-6042A

11-Band Graphic/Parametric Equalizer

- High Performance, 9-Band Graphic Equalizer, 2 Half-DIN Parametric Bands
- Variable Subwoofer Output (30Hz-150Hz)
- Dual Illumination

Marine



KDC-232MR

Marine CD Receiver

- Detachable Faceplate
- Rotary Encoder & Jog Control Knob for Easy Operation
- 14-Segment FL Display (8-Digit, Scroll On/Off selectable)
- Maximum Output Power: 50W x 4 (MOSFET Power IC)
- System Q
- SIRIUS Satellite Radio Ready
- HD Radio Ready
- External Media Control — iPod Ready
- TEL Mute
- AUX Input with Optional Unit (CA-C1AUX or KCA-S210A)
- 1 Preout
- Marine Wired Remote Ready (KCA-RC50MR)
- Conformal Coated Main PCB



KCA-RC50MR/RC50MRB

Wired Marine Remote Control

- Finish: White (KCA-RC50MR); Black (KCA-RC50MRB)
- Works with KDC-225MR and
- Other Marine In-Dash Receivers
- Wired Remote Control
- SIRIUS Satellite Radio Ready



KTS-300MR

Marine CD Receiver

- Conformal Coated PCB
- Flip-Down CD Door
- 50W x 4 MOSFET Power IC
- Full Memory Backup
- Large Display with White LED Backlighting
- CD Door Open Indication for Display
- Direct Source Selection Keys
- System Q/Dual Zone
- External Media Control — iPod Ready
- 2 Preouts with HPF/LPF (Rear/SW Switchable)
- AUX Input with Optional Unit
- Hard Wired IR/Data Port for KCA-RC100MR

KCA-RC100MR

Wired Marine Remote Control

- 14 Segment LCD with Scrolling Text
- Direct Source Selections
- Flush Trim Bezel
- Single Water-resistant Connection
- Optional Y-Adapter for Additional Controllers
- Compatible with KTS-MP400MR and KTS-300MR

*KTS-MP400MR, KTS-300MR and KCA-RC100MR are available to authorized Kenwood retailers through TriStar Distributing, a DEHCO Company.

KGC-4042A

5-Band Graphic Equalizer

- A Graphic Equalizer of 5 Bands
- Variable Subwoofer Output (30Hz-150Hz)



MAX POWER 150W

KFC-1652MRW/1652MRB

6.5" 2-Way Marine Speaker

- Finish: White (KFC-1652MRW); Black (KFC-1652MRB)
- Water-resistant Polypropylene Cone
- UV Resistant Grille and Frame
- Balanced Dome Tweeter



MAX POWER 700W

KFC-W254MR

10" Marine Subwoofer

- Water-resistant Polypropylene Cone
- Free Air Application Design
- Single 4 ohm Voice Coil • Vented Voice Coil



MAX POWER 200W

P-WD250MRW

10" Marine Subwoofer and Amplifier Package

- Conformal-coated PCB
- Free Air Application Design
- Vented Voice Coil
- RCA and Speaker Level Inputs
- 10" Subwoofer with Dual Voice Coil

Power Amplifiers



KAC-9152D

MAX POWER 1800W

High Quality Mono Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Dual Mono Drive Connection (2-4 ohms)
- Class D Amplifier Circuit
- Variable Bass Boost with Wired Remote
- Built-in Variable Low-pass Filter
- Built-in Infrasonic Filter
- Gold Plated RCA Inputs/Outputs
- Speaker Level Input
- 1 Ω Stable
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation

KAC-9102D

MAX POWER 1700W

High Quality Mono Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Class D Amplifier Circuit
- Variable Bass Boost
- Built-in Variable Low-pass Filter
- Built-in Infrasonic Filter
- RCA Inputs/Outputs
- Speaker Level Input
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation

KAC-8152D

MAX POWER 1100W

High Quality Mono Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Class D Amplifier Circuit
- Variable Bass Boost with Wired Remote
- Built-in Variable Low-pass Filter
- Built-in Infrasonic Filter
- Gold Plated RCA Inputs/Outputs
- Speaker Level Input
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation



KAC-7252

MAX POWER 1000W

High Quality 2-channel Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Variable Bass Boost with Wired Remote
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- Gold Plated RCA Inputs/Outputs
- Cooling Fan
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation

KAC-7202

MAX POWER 920W

High Quality 2-channel Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Variable Bass Boost
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- RCA Inputs/Outputs
- Speaker Level Input
- Cooling Fan
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation



KAC-8452

MAX POWER 800W

High Quality 4-channel Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Bass Boost
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- Gold Plated RCA Inputs/Outputs
- Speaker Level Input: A and B Channel
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation

KAC-8402

MAX POWER 720W

High Quality 4-channel Power Amplifier

- Cast Aluminum Heat Sink
- Detachable Aluminum Dress Plate & Top Panel Control
- Bass Boost
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- RCA Inputs/Outputs
- Speaker Level Input: A and B Channel
- Power MOSFET Switching Power Supply
- Single-side Exposure of Terminals for Multi-Installation



KAC-6402

MAX POWER 400W

High Quality 4-channel Power Amplifier

- Cast Aluminum Heat Sink
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- Speaker Level Input
- Power MOSFET Switching Power Supply

KAC-6202


MAX POWER 400W

High Quality 2-channel Power Amplifier

- Cast Aluminum Heat Sink
- Built-in Variable Low-pass Filter
- Built-in Variable High-pass Filter
- Speaker Level Input
- Power MOSFET Switching Power Supply

Dual Mono Drive

Power Hungry? The KAC-9152D with Dual Mono Drive allows two KAC-9152D amplifiers to work in unison to a single subwoofer delivering twice the power than that of a single amplifier.

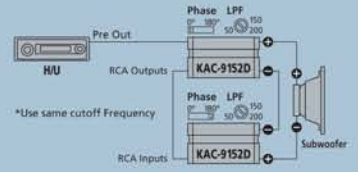

SPECIFICATIONS

	KAC-9152D	KAC-9102D	KAC-8152D
Power Output			
4 Ohm@14.4V	500 Watts x 1 (20-200Hz, 0.5%THD)	500 Watts x 1 (20-200Hz, 0.5%THD)	300 Watts x 1 (20-200Hz, 0.5%THD)
2 Ohm@14.4V	900 Watts x 1 (100Hz, 0.9%THD)	850 Watts x 1 (100Hz, 0.9%THD)	550 Watts x 1 (100Hz, 0.9%THD)
1 Ohm@14.4V	900 Watts x 1 (100Hz, 1.0%THD)	—	—
Maximum Output Power	1,800 Watts	1,700 Watts	1,100 Watts
Power Output: CEA-2006 Standard			
RMS Power Output	500 Watts (1.0% THD+N) (4-ohm/1ch)	500 Watts (1.0% THD+N) (4-ohm/1ch)	300 Watts (1.0% THD+N) (4-ohm/1ch)
RMS Power Output	900 Watts (1.0% THD+N) (2-ohm/1ch)	850 Watts (1.0% THD+N) (2-ohm/1ch)	550 Watts (1.0% THD+N) (2-ohm/1ch)
Audio Features			
Low-Pass Filter	50Hz-200Hz (Variable), 24dB/oct	50Hz-200Hz (Variable), 24dB/oct	50Hz-200Hz (Variable), 24dB/oct
Infrasonic Filter	Off/15Hz/25Hz (Selectable), 18dB/oct	Off/15Hz/25Hz (Selectable), 18dB/oct	Off/15Hz/25Hz (Selectable), 18dB/oct
Bass Boost	Off - +18dB (Variable), 40-100Hz (Variable)	Off - +18dB (Variable), 40Hz	Off - +18dB (Variable), 40-100Hz (Variable)

SPECIFICATIONS

	KAC-7252	KAC-7202	KAC-8452	KAC-8402	KAC-6202	KAC-6402
Power Output						
4 Ohm@14.4V	170 Watts x 2 (20-20kHz, 0.08%THD)	150 Watts x 2 (20-20kHz, 0.08%THD)	70 Watts x 4 (20-20kHz, 0.08%THD)	60 Watts x 4 (20-20kHz, 0.08%THD)	60 Watts x 2 (20-20kHz, 0.08%THD)	35 Watts x 4 (20-20kHz, 0.08%THD)
2 Ohm@14.4V	250 Watts x 2 (1kHz, 0.8%THD)	230 Watts x 2 (1kHz, 0.8%THD)	100 Watts x 4 (1kHz, 0.8%THD)	90 Watts x 4 (1kHz, 0.8%THD)	100 Watts x 2 (1kHz, 0.8%THD)	50 Watts x 4 (1kHz, 0.8%THD)
Bridged@14.4V	500 Watts x 1 (1kHz, 0.8%THD)	460 Watts x 1 (1kHz, 0.8%THD)	200 Watts x 2 (1kHz, 0.8%THD)	180 Watts x 2 (1kHz, 0.8%THD)	200 Watts x 1 (1kHz, 0.8%THD)	100 Watts x 2 (1kHz, 0.8%THD)
Maximum Output Power	1,000 Watts	920 Watts	800 Watts	720 Watts	400 Watts	400 Watts
Power Output: CEA-2006 Standard						
RMS Power Output	170 Watts (1.0% THD+N) (4-ohm/2ch)	150 Watts (1.0% THD+N) (4-ohm/2ch)	70 Watts (1.0% THD+N) (4-ohm/4ch)	60 Watts (1.0% THD+N) (4-ohm/4ch)	60 Watts (1.0% THD+N) (4-ohm/2ch)	40 Watts (1.0% THD+N) (4-ohm/4ch)
RMS Power Output	250 Watts (1.0% THD+N) (2-ohm/2ch)	230 Watts (1.0% THD+N) (2-ohm/2ch)	100 Watts (1.0% THD+N) (2-ohm/4ch)	90 Watts (1.0% THD+N) (2-ohm/4ch)	100 Watts (1.0% THD+N) (2-ohm/2ch)	50 Watts (1.0% THD+N) (2-ohm/4ch)
Audio Features						
Low-Pass Filter	50Hz-200Hz (Variable), 24dB/oct	50Hz-200Hz (Variable), 24dB/oct	50Hz-200Hz (Variable), 18dB/oct (Bch)	50Hz-200Hz (Variable), 18dB/oct (Bch)	50Hz-200Hz (Variable), 12dB/oct	50Hz-200Hz (Variable), 12dB/oct (A,Bch)
High-Pass Filter	50Hz-200Hz (Variable), 12dB/oct	50Hz-200Hz (Variable), 12dB/oct	50Hz-200Hz (Variable), 12dB/oct (A,Bch)	50Hz-200Hz (Variable), 12dB/oct (A,Bch)	50Hz-200Hz (Variable), 12dB/oct	50Hz-200Hz (Variable), 12dB/oct (A,Bch)
Bass Boost	Off - +18dB (Variable), 40-100Hz (Variable)	Off - +18dB (Variable), 40Hz	Off / +6dB, 90Hz (Bch)	Off / +6dB, 90Hz (Bch)	—	—

Subwoofers



KFC-W3514DVC

MAX POWER 1500W

12" Subwoofer

- 12" Titanium Coated Cone Woofer
- Rubber Surround
- Dual Voice Coil System (4Ω+4Ω)
- Rubber Magnet Cover
- Easy Connection Speaker Terminal (Series/Parallel/Bi-amp)
- 8 AWG Wire Capability
- Removable Gasket for back installation



KFC-W3010

MAX POWER 1000W

12" Subwoofer

- 12" "TYPHOON" shaped Pearl Mica P.P. Cone Woofer
- High-Roll Urethane Surround



KFC-W2510

MAX POWER 800W

10" Subwoofer

- 10" "TYPHOON" shaped Pearl Mica P.P. Cone Woofer
- High-Roll Urethane Surround

With all terminals positioned on one side, series and parallel wiring is a cinch. The new magnet cover also laps over parts of the basket for better sound and cosmetic appearance. The gasket is detachable for 2 way installation, both front and back.



KFC-W300S

MAX POWER 600W

12" Subwoofer

- 12" Subwoofer
- 12" Injection P.P.Cone Woofer



KSC-WD250

MAX POWER 200W

10" Powered Subwoofer



KSC-WD250T

MAX POWER 200W

10" Truck Powered Subwoofer

- 10" Cone Woofer
- Dual Voice Coil
- Bass Reflex Enclosure
- D-Class Amplifier Circuit
- RCA Input Terminal
- Speaker Input for Easy Up-grade
- Supplied with Wired Remote: Volume, Low-Pass Filter (50/80/100/150Hz), Phase Controllable



KSC-SW1

MAX POWER 150W

6-1/2" Powered Subwoofer

- 6-1/2" Concave Cone Drive Unit
- 6-1/2" Concave Cone Passive Radiator
- Remote Controllable Variable Low-Pass Filter (50-120Hz)
- Remote Controllable Phase Reverse Switch
- Dual Voice Coil

SPECIFICATIONS

	KFC-W3514DVC		KFC-W3010		KFC-W2510		KFC-W300S	
Type	Subwoofer		Subwoofer		Subwoofer		Subwoofer	
Peak Input Power	1,500 Watts		1,000Watts		800 Watts		600 Watts	
Rated Input Power	380 Watts		200 Watts		170 Watts		150 Watts	
Sensitivity	93dB/W/m		93dB/W/m		91dB/W/m		91dB/W/m	
Impedance	4 ohms + 4 ohms		4 ohms		4 ohms		4 ohms	
Frequency Response	25Hz - 800Hz		25Hz - 800Hz		28Hz - 800Hz		30Hz - 600Hz	
Magnet Weight	42.2oz		63.4oz		49.3oz		17.6 oz	
Mounting Depth	6-3/4"		5-5/16"		4-5/8"		5-1/16"	
Thiele-Small Parameters								
DC Resistance (Re)	3.3 Ω + 3.3 Ω		1.8 Ω + 1.8 Ω		1.8 Ω + 1.8 Ω		3.2 Ω	
Resonant Frequency (Fs)	37Hz		34Hz		34Hz		27Hz	
Mechanical Q Factor (Qms)	4.87		4.15		4.15		7.22	
Electrical Q Factor (Qes)	1.00		0.42		0.42		0.70	
Total Q Factor (Qts)	0.84		0.38		0.38		0.64	
Volume Acoustic Compliance (VAS)	28.16 liters/0.994 cu. Ft.		37.25 liters/1.315 cu. Ft.		37.25 liters/1.315 cu. Ft.		96.10 liters/3.390 cu. Ft.	
Moving Mass (Mms)	221.0g		121.5g		121.5g		118.7g	
Voice Coil Diameter	2-9/16"		2-1/16"		2-1/16"		1-7/8"	
Force Factor (Bl)	18.4 Tm		7.4 Tm		7.4 Tm		9.6 Tm	
Peak Excursion (Xmax)	14mm		6mm		6mm		9mm	
Recommended Enclosure								
	Sealed	Vented	Sealed	Vented	Sealed	Vented	Sealed	Vented
Volume (cu. ft)	1.2	1.7	1.0	1.5	0.8	1.0	1.0	1.5
W	14-3/4"	18-1/16"	14-5/8"	14-15/16"	13-5/8"	12-13/16"	16-9/16"	17-9/16"
H	14-1/4"	16-1/8"	14-3/16"	19-7/8"	12-13/16"	20-1/16"	14-15/16"	15-5/8"
D	14-3/16"	14-1/16"	13-3/4"	13-3/8"	12-7/16"	10-5/8"	11"	13-3/8"
Mounting Hole	11"		10-7/8"		9-3/16"		10-13/16"	
Port Diameter	—	3-1/2"	—	3"	—	3"	—	4"
Port Length	—	6"	—	7"	—	7"	—	7"
Displacement (cu. ft)	0.207		0.144		0.084		0.046	

SPECIFICATIONS

	KSC-WD250/WD250T		KSC-SW1
Type	Powered Subwoofer		Powered Subwoofer
Maximum Power	200 Watts		150 Watts
Rated Power	100 Watts		75 Watts
Sensitivity	90dB/W/m		85dB/W/m
Impedance	1.5 ohms		2 ohms + 2 ohms
Frequency Response	28Hz - 1kHz		35Hz - 120Hz

Speakers



KFC-P707

MAX POWER 280W

High Performance Flush Mount Component Speaker Package

- 6-3/4" Titanium Coated Cone Woofer
- Rubber Surround
- Supplied with adaptor for 6-1/2" Size and GM/HONDA Installation
- 13/16" U.F.L.C. Soft Dome Tweeter
- 2-Way Mounting: Flush/Surface



KFC-P507

MAX POWER 240W

High Performance Flush Mount Component Speaker Package

- 5-1/2" Titanium Coated Cone Woofer
- Rubber Surround
- 13/16" U.F.L.C. Soft Dome Tweeter
- 2-Way Mounting: Flush/Surface



MAX POWER 280W

KFC-T207

13/16" Component Tweeter

- 13/16" U.F.L.C. Soft Dome Tweeter
- 2-Way Mounting: Flush/Surface



MAX POWER 120W

KFC-ST30

13/16" Component Tweeter

- 13/16" P.E.I. Balanced Dome Tweeter
- High Power Handling (Peak 120W)

SPECIFICATIONS

	KFC-P707	KFC-P507	KFC-T207	KFC-ST30
Type	Component Package	Component Package	Tweeter	Tweeter
Peak Input Power	280 Watts	240 Watts	280 Watts	120 Watts
Rated Input Power	65 Watts	45 Watts	65 Watts	40 Watts
Sensitivity	92dB/W/m	91dB/W/m	90dB/W/m	90dB/W/m
Impedance	4 ohms	4 ohms	4 ohms	4 ohms
Frequency Response	30Hz-35kHz	35Hz-35kHz	3.5kHz-35kHz	5kHz-25kHz
Magnet Weight	(W)11.6oz/(T)0.2oz	(W)8.8oz/(T)0.2oz	0.2oz	0.03oz
Mounting Depth	2-3/16"	2-3/8"	—	—

Speakers



KFC-6990ie MAX POWER 400W
6" x 9" 2-way Flush Mount Speaker System

- 6" x 9" Titanium Coated Cone Woofer
- Rubber Surround
- 1-3/16" Soft Dome Tweeter
- Image Enhancer



KFC-6970ie MAX POWER 400W
6" x 9" 4-way Flush Mount Speaker System

- 6" x 9" P.P. Mica Cone Woofer
- Rubber Surround
- 2-3/4" Water-resistant Cone Midrange
- 13/16" P.E.I. Dome Tweeter
- 13/16" P.E.I. Balanced Dome Super-Tweeter
- Image Enhancer



KFC-6960ie MAX POWER 300W
6" x 9" 3-way Flush Mount Speaker

- 6" x 9" P.P. Mica Cone Woofer
- Rubber Surround
- 1-15/16" Water-resistant Cone Midrange
- 13/16" P.E.I. Balanced Dome Tweeter
- Image Enhancer



KFC-6950S MAX POWER 200W
6" x 9" Dual Cone Speaker

- 6" x 9" P.P. Mica Cone Woofer
- Cloth Edge



KFC-C6880ie MAX POWER 240W
6" x 8" 2-way Custom Fit Speaker System

- 6" x 8" P.P. Mica Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Tweeter
- Image Enhancer



KFC-C5780ie MAX POWER 220W
5" x 7" 2-way Custom Fit Speaker System

- 5" x 7" P.P. Mica Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Tweeter
- Image Enhancer



KFC-4675/4675C MAX POWER 60W
4" x 6" 2-way Flush Mount Speaker

- 4" x 6" Injection-Molded Polypropylene Cone Woofer
- 1" Polyamide Balanced Dome Tweeter



KFC-415C MAX POWER 160W
4" x 10" 2-way Flush Mount Speaker

- 4" x 10" Injection-Molded Polypropylene Cone Woofer
- 2-3/8" Polyamide Balanced Dome Tweeter



KFC-835C MAX POWER 40W
3-1/2" Round Speaker

- 3-1/2" Water-resistant Cone Woofer
- Whizzer Cone

SPECIFICATIONS

	KFC-6990ie	KFC-6970ie	KFC-6960ie	KFC-6950S	KFC-C6880ie	KFC-C5780ie	KFC-4675/4675C	KFC-415C	KFC-835C
Type	2-way 2-speaker	4-way 4-speaker	3-way 3-speaker	Dual Cone	2-way 2-speaker	2-way 2-speaker	2-way 2-speaker	2-way 2-speaker	Dual Cone
Peak Input Power	300 Watts	400 Watts	300 Watts	200 Watts	240 Watts	220 Watts	60 Watts	160 Watts	40 Watts
Rated Input Power	80 Watts	80 Watts	75 Watts	50 Watts	60 Watts	40 Watts	15 Watts	40 Watts	10 Watts
Sensitivity	93dB/W/m	93dB/W/m	92dB/W/m	92dB/W/m	92dB/W/m	91dB/W/m	90dB/W/m	91dB/W/m	89dB/W/m
Impedance	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Frequency Response	28Hz-25kHz	28Hz-30kHz	28Hz-25kHz	28Hz-25kHz	25Hz-25kHz	30Hz-25kHz	50Hz-25kHz	40Hz-25kHz	96Hz-20kHz
Magnet Weight	20.5oz	15.6oz	11.6oz	8.2oz	8.1oz	6.5oz	2.9oz	8.2oz	5.6oz
Mounting Depth	3-1/8"	3-1/16"	3-1/16"	2-15/16"	2-3/8"	2-1/16"	1-5/8"	2-7/16"	1-1/2"



KFC-C1739ie MAX POWER 170W
7" 3-way Custom Fit Speaker System

- 7" Pearl Mica P.P. Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Midrange
- 3/8" P.E.I. Dome Tweeter
- Image Enhancer



KFC-1690ie MAX POWER 250W
6-3/4" 2-way Flush Mount Speaker System

- 6-3/4" Titanium Coated Cone Woofer
- Rubber Surround
- Supplied with adaptor for 6-1/2" Size and GM/HONDA Installation
- 13/16" U.F.L.C. Soft Dome Tweeter
- Image Enhancer



KFC-1390ie MAX POWER 180W
5-1/2" 2-way Flush Mount Speaker System

- 5-1/2" Titanium Coated Cone Woofer
- Rubber Surround
- 13/16" U.F.L.C. Soft Dome Tweeter
- Image Enhancer



KFC-1680ie MAX POWER 240W
6-1/2" 2-way Flush Mount Speaker System

- 6-1/2" P.P. Mica Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Tweeter
- Image Enhancer



KFC-1660S MAX POWER 170W
6-1/2" 2-way Flush Mount Speaker System

- 6-1/2" Dimple Shaped P.P. Mica Cone Woofer
- 1-3/8" P.E.I. Balanced Dome Tweeter



KFC-1650S MAX POWER 160W
6-1/2" Dual Cone Flush Mount Speaker System

- 6-1/2" Dimple Shaped P.P. Mica Woofer
- P.E.I. Sub Cone

KFC-1380ie

MAX POWER 160W
5-1/4" 2-way Flush Mount Speaker System

- 5-1/4" P.P. Mica Cone Woofer
- Rubber Surround
- 1" P.E.I. Balanced Dome Tweeter
- Image Enhancer

KFC-1360S

MAX POWER 140W
5-1/4" 2-way Flush Mount Speaker System

- 5-1/4" Dimple Shaped P.P. Mica Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Tweeter

KFC-1350S

MAX POWER 130W
5-1/4" Dual Cone Flush Mount Speaker System

- 5-1/4" Dimple Shaped P.P. Mica Cone Woofer
- P.E.I. Sub Cone

KFC-1080ie

MAX POWER 140W
4" 2-way Flush Mount Speaker System

- 4" P.P. Mica Cone Woofer
- Rubber Surround
- 1" P.E.I. Balanced Dome Tweeter
- Image Enhancer

KFC-1060S

MAX POWER 120W
4" 2-way Flush Mount Speaker System

- 4" Dimple Shaped P.P. Mica Cone Woofer
- 1-3/16" P.E.I. Balanced Dome Tweeter

KFC-1050S

MAX POWER 110W
4" Dual Cone Flush Mount Speaker System

- 4" Dimple Shaped P.P. Mica Cone Woofer
- P.E.I. Sub Cone

SPECIFICATIONS

	KFC-C1739ie	KFC-1690ie	KFC-1680ie	KFC-1660S	KFC-1650S	KFC-1390ie	KFC-1380ie	KFC-1360S	KFC-1350S	KFC-1080ie	KFC-1060S	KFC-1050S
Type	3-way 3-speaker	2-way 2-speaker	2-way 2-speaker	2-way 2-speaker	Dual Cone	2-way 2-speaker	2-way 2-speaker	2-way 2-speaker	Dual Cone	2-way 2-speaker	2-way 2-speaker	Dual Cone
Peak Input Power	170 Watts	250 Watts	240 Watts	170 Watts	160 Watts	180 Watts	160 Watts	140 Watts	130 Watts	140 Watts	120 Watts	110 Watts
Rated Input Power	40 Watts	50 Watts	40 Watts	35 Watts	35 Watts	35 Watts	35 Watts	28 Watts	28 Watts	20 Watts	20 Watts	20 Watts
Sensitivity	92dB/W/m	92dB/W/m	92dB/W/m	92dB/W/m	92dB/W/m	91dB/W/m	91dB/W/m	91dB/W/m	91dB/W/m	91dB/W/m	91dB/W/m	90dB/W/m
Impedance	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms	4 ohms
Frequency Response	30Hz-30kHz	30Hz-25kHz	35Hz-20kHz	35Hz-22kHz	35Hz-20kHz	40Hz-25kHz	45Hz-20kHz	40Hz-22kHz	40Hz-20kHz	45Hz-20kHz	45Hz-22kHz	45Hz-20kHz
Magnet Weight	6.3oz	10oz	8.1oz	6.3oz	6.3oz	8.1oz	5.6oz	6.3oz	5.3oz	5.6oz	4.4oz	3.5oz
Mounting Depth	2-5/16"	2-1/4"	1-13/16"	1-3/4"	1-11/16"	2-5/16"	1-13/16"	1-3/4"	1-3/4"	1-11/16"	1-5/8"	1-5/8"

Rear Seat Entertainment



LZH-100W

10.2" Wide Overhead Monitor with DVD Player

- 10.2 inch Wide Color TFT Retractable Display
- Swivel Function for Optimum View Adjustment
- Anti-Glare Screen Coating
- Display Mode Selector (Zoom/Cinema/Wide/Full)
- 2 RCA AV Inputs/1 RCA AV Output
- Built-in DVD Player
- DVD/VCD/CD/MP3 Playback
- Dolby Digital
- DVD-R/RW, CD-R/RW Compatible
- Built-in IR/FM Transmitter
- Built-In Dome Lamps
- Supplied with 2 Wireless Headphones (KHP-IR71)
- Supplied with Remote Control Unit
- Supplied with Mounting Bracket/Trim Ring



2AV-in 1AV-Out

LZ-702IR

6.95" Wide TFT Display

- 6.95 inch Wide TFT Display
- Number of Pixels: 336,960
- Display Mode Selector (Normal/Full/Zoom/Cinema/Just)
- Auto Dimmer Control
- 2 AV Inputs (RCA, PAL/NTSC Automatic Selection)
- 1 AV Output (RCA)
- IR Transmitter Output (2 channel)
- Remote Sensor
- Supplied with Headrest Mounting Bracket



KDV-S210P

DVD Player

- On-Screen Display for Monitor
- DVD, VCD, CD-R/RW, MP3 Compatible
- Dolby Digital/Linear PCM Decoder
- On-Screen Display for Monitor
- Resume/Random/Repeat/Search Play
- 1 RCA AV output (PAL or NTSC according to the source)



2AV-in 1AV-Out

LZ-6500W

6.5" Wide Rear Monitor

- 6.5 inch Wide LCD Display
- Number of Pixels: 280,800
- Display Mode Selector (Normal/Full/Zoom/Cinema)
- 2 AV Inputs, 1 AV Output
- Flush-Mount Trim Ring
- Full Function Wireless Remote Control



KVA-S300

AV Selector Unit

- 3 AV Inputs, 3 AV Outputs
- Integrated Video Signal Booster
- Reverse Gear Sensor for Rear View Camera
- Headphone Output with Volume Control



KHP-IR70

Wireless Headphones

- IR Stereo Headphones



Accessories



KCA-BT100

Bluetooth Hands-Free Unit

- Wireless Connection via Bluetooth technology
- Receives and Makes Call from Compatible Kenwood Receivers
- Calls by Direct Dialing, Phonebook and History
- Private Conversation Function
- Phonebook download
- Registers up to 5 Cellphones
- Status Display (Active Cellphone, Radio Wave Strength, Battery)



KCA-iP500

iPod Interface

- Compatible with most Kenwood receivers with external media control released in 2003 and later.
- Text Display, Multiple Search Mode
- Powers and charges iPod
- Dimensions (W x H x D): 3-1/8" x 2-5/16" x 7/8"



KCA-R71FM

Modulator FM



KCA-S210A

Changer Switch-Box



KCA-M120 / M110

10-Disc CD Magazine



KCA-M112

10-Disc CD Magazine



KCA-M612

6-Disc CD Magazine



SK-701RM

Monitor Mount Kit



CA-C1AUX

AUX Adaptor



CA-C2AX

AUX Adaptor



CA-C2EX

2m Extension Cable



CA-DS100

Adaptor Cable



CA-SD200

Adaptor Cable




KOS-A200

External Media Controller with RDS Encoder

- Displays Text Information from USB and 5L Interface on Factory Radio
- USB Interface x 1
- 5L Interface x 1
- AUX Input x 2 (RCA/Mini Jack)
- Antenna Input/Output
- Supplied with Remote Control Unit

Kenwood's KOS-A200 hideaway box liberates OEM radios. Connect USB-based product, 5 L bus type product or Auxiliary Inputs to a factory radio enabled with an RBDS tuner. View audio and text information on the factory stereo, artist, album, etc., from satellite radio, and ID3 tag information from MP3 players. The KOS-A200 also interfaces OEM radios with Kenwood CD players, changers, audio for DVD players — the sky's the limit!

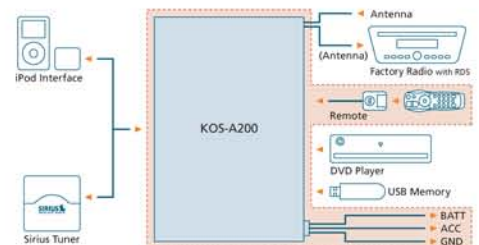

Listen to the Future

Kenwood U.S.A. Corporation

www.kenwoodusa.com
www.kenwoodusa.com/inquiry
1-800-KENWOOD

Main Office
2201 E. Dominguez St. P.O. Box 22745
Long Beach, CA 90810-1009 Long Beach, CA 90801-5745



©2006 Kenwood USA Corporation. All Rights Reserved. The information in this catalog is subject to change without notice.

Notes: • Dolby Surround, Pro Logic II and the double-D symbol are trademarks of Dolby Laboratories. • dts is trademark of Digital Theater System, Inc. • Apple, iPod and iTunes are registered trademarks of Apple Computer, Inc. • The SRS logo are trademarks or registered trademarks of SRS Labs, Inc. • Sirius and related marks are trademarks of Sirius Satellite Radio Inc.

